

Tel 01925 571557
Email info@hausglass.co.uk
Web www.hausglass.co.uk
Showroom 102 Gainsborough Road,
 Warrington, Cheshire, WA4 6BN



Performance

U-Value - 1.5W/m²K using correct unit

Security - PAS24

Air Tightness - Class 4, 600Pa

Wind resistance - Class 4, 1800Pa

Water resistance - Class E, 750Pa

Document L compliant

Technical

Frame vent section - 50mm

Maximum height - 2500mm


Maximum width - 1200mm per sash

Glass thickness - Up to 36mm


Frame depth - 70mm

Typical sightline - 132mm

- Our glass specification as standard is 'A' rated with a centre pane U Value of 1.1 giving you the best energy efficiency rating at the best cost. We never up sell any glazing product unless you have to adhere to a particular U value set by your Building Regulations Officer or your planning permission conditions. This means that we can offer a tailor made service to suit your glazing/U Value requirements.
- Using our glazing units containing argon gas and black warm edge spacer bar as standard, a U Value of 1.5 overall is achieved.
- Options of triple glazed units or laminated glass to external panel are available for added security - meeting Part Q regulations if required.
- The standard ral colours for this range Anthracite grey 7016M, White 9910G, Black 9005M.
- Standard Handle – Inline Lever Handle.
- Non standard handle type available as an upgrade - Hafi 253/280 stainless steel.
- 6 multi point locking system.
- Standard lever handle colours are Black 9005M, White 9910G, Chrome (polished or satin).
- Hinges/D-handles/Slave handles/ Standard colours White 9910G, Black 9005M.
- Option of upgrade to a integrated d/pull combination locking handle to slave door.
- Locking barrel is a 3 star 50/50 anti snap anti bump as standard giving high security.
- All the above can be colour coded to match any frame colour.
- The sight lines for this product are minimal (with a mullion width of 132mm) and have squared beaded architectural edges for that real contemporary style.
- Standard colours - 10/14 days.
- Non standard Ral 3/4 weeks.
- Trickle vents are not standard, but can be added if required to meet building regulations in black or white as standard.



Textured Sensations finishes available

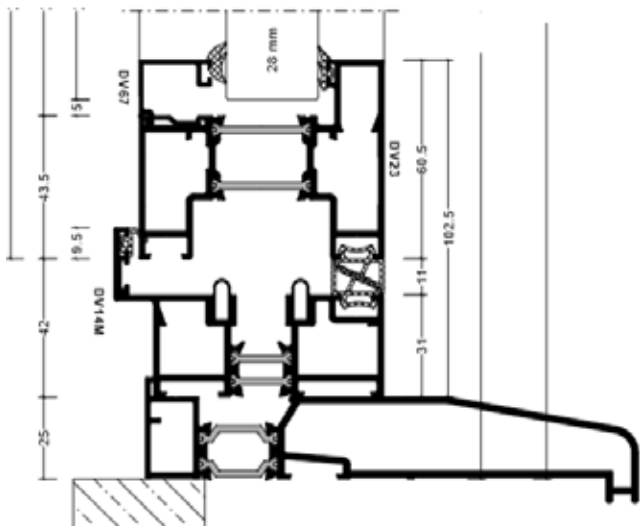

Upgraded Integrated D/pull Handle



Standard Lever



Upgraded Hafi Stainless Steel 253 Handle